

BDO 13




Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.241
Watt Δt 40° = Watt Δt 50° x 0.768
Watt Δt 30° = Watt Δt 50° x 0.546
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar




UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°

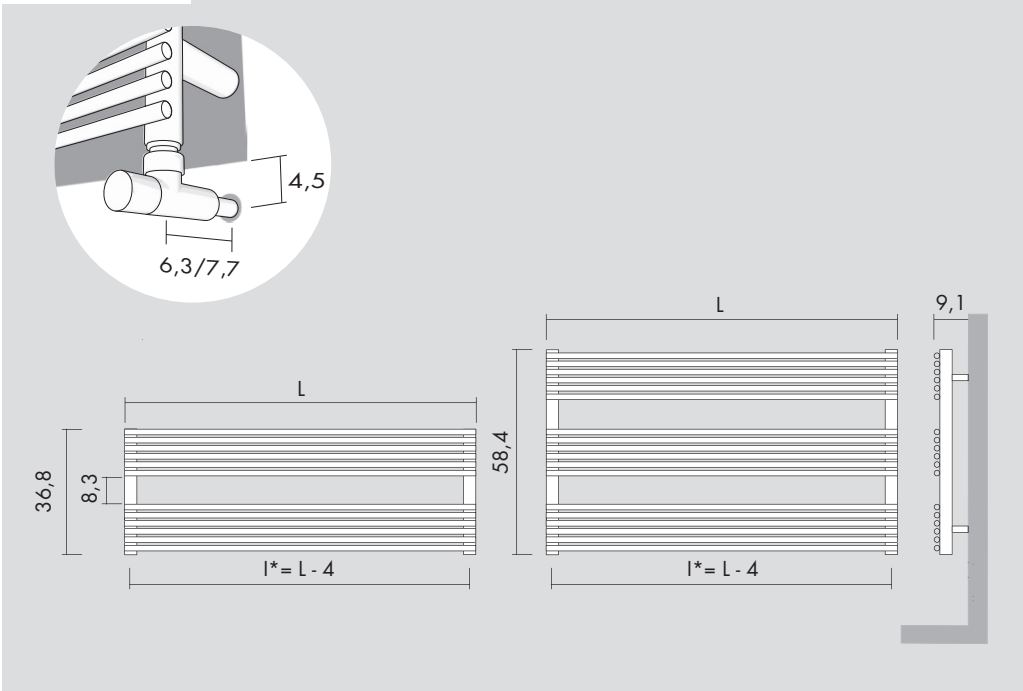


H cm	L cm	I* cm	art*	lit*	watt Δt 30°	watt Δt 50°	watt Δt 30°	watt Δt 50°
36.8	120.0	116.0	BD13S120036	2.6	252	462	169	310
36.8	140.0	136.0	BD13S140036	2.9	294	539	197	361
36.8	160.0	156.0	BD13S160036	3.3	336	616	225	413
58.4	120.0	116.0	BD13S120058	4.0	378	693	253	464
58.4	140.0	136.0	BD13S140058	4.5	442	809	296	542
58.4	160.0	156.0	BD13S160058	4.9	505	924	338	619

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar



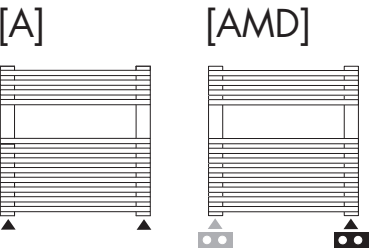


Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

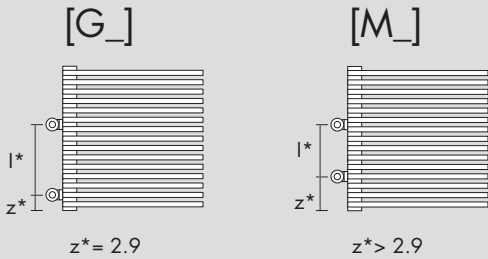

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

Optional

 (P* = 224)	 (P* = 226)	 (I* = 5 cm)	 Ø ≤ 16 mm [BIAN] CTB [CROM] CTR 16 mm < Ø < 24 mm [BIAN] CWB [CROM] CWR	 (2 pz.) (P* = 220)
Angled Valve Vanne équerre Eckausführung Ventil Válvula a escuadra	Thermostatic head Tête thermostatique Thermostatkopf Cabezal termostático	Sleeving kit Kit couvre tuyau Rosetten Kit cubre tubo		Towel hooks Paire de patère Crochet das Bugel Percha
[BIAN] E12SQB [CROM] E12SQR	[BIAN] TTB [CROM] TTR	[BIAN] C5B [CROM] C5R		[CROM] BA13R [COLOUR] BA13C [GOLD] BA13G

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
lit* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página