




Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.241
Watt Δt 40° = Watt Δt 50° x 0.768
Watt Δt 30° = Watt Δt 50° x 0.546
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar


H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
101.6	40.0	36.0	PV13V040100_	2.2	97	177
101.6	50.0	46.0	PV13V050100_	4.1	150	275
159.2	40.0	36.0	PV13V040160_	5.7	194	355
159.2	50.0	46.0	PV13V050160_	5.9	199	365

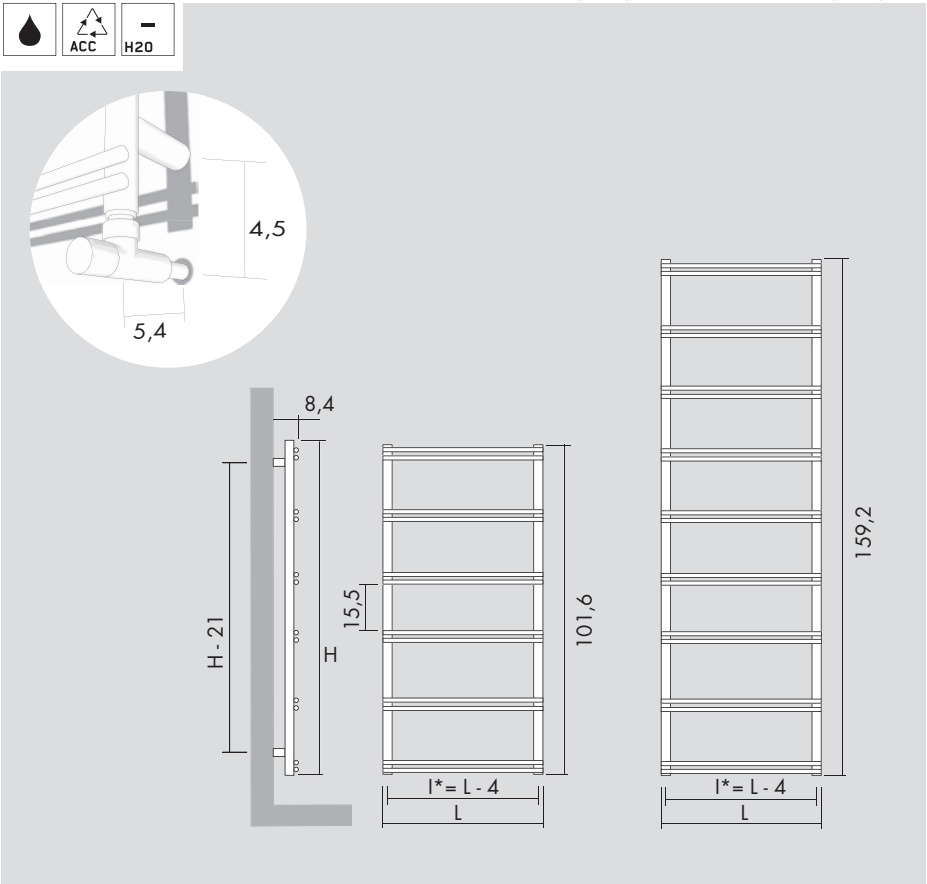

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

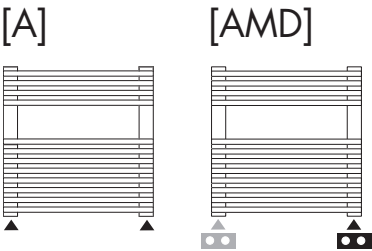

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

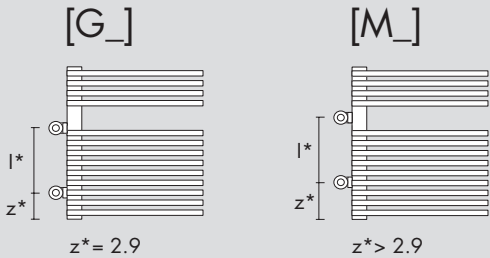

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento


Dual application with schuko plug / Version mixte avec prise schuko / Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	l* cm	art*	lit*	watt Δt 30°	watt Δt 50°	watt
101.6	40.0	29.5	MC PV13V040100_	2.2	97	177	200
101.6	50.0	39.5	MC PV13V050100_	4.1	150	275	250
159.2	40.0	29.5	MC PV13V040160_	5.7	194	355	350
159.2	50.0	39.5	MC PV13V050160_	5.9	199	365	350

Standard



Heating element
Résistance
Heizstab
Resistencia

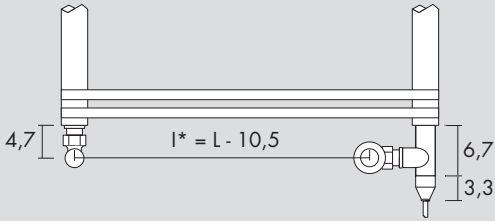



Receiver
Récepteur
Empfänger
Receptor

R10



ECODESIGN
Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T11

Dual electric element with thermostat / Mixte résistance avec thermostat / Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	l* cm	art*	lit*	watt Δt 30°	watt Δt 50°	watt
101.6	40.0	29.5	MT PV13V040100_	2.2	97	177	200
101.6	50.0	39.5	MT PV13V050100_	4.1	150	275	250
159.2	40.0	29.5	MT PV13V040160_	5.7	194	355	350
159.2	50.0	39.5	MT PV13V050160_	5.9	199	365	350

Standard




Thermostat
Thermostat
Der Thermostat
Termostato



ECODESIGN
Infrared remote control
Télécommande infrarouge
Infrarot-Fernbedienung
Mando por infrarrojos

[BIAN]
[CROM]

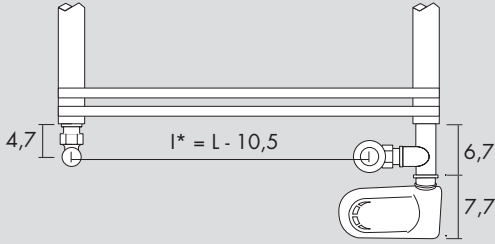




Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra

[BIAN] **E12SQB**
[CROM] **E12SQR**



Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[BIAN] **TTB**
[CROM] **TTR**



Ø ≤ 16 mm
[BIAN] **CTB**
[CROM] **CTR**

16 mm < Ø < 24 mm
[BIAN] **CWB**
[CROM] **CWR**



2 pz.
Towel hooks
Paire de patère
Crochet das Bugel
Percha

[CROM] **BA25R**
[COLOUR] **BA25C**
[GOLD] **BA25G**

art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
lit* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento

Pieno



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.251
Watt Δt 40° = Watt Δt 50° x 0.761
Watt Δt 30° = Watt Δt 50° x 0.536
Watt Δt 20° = Watt Δt 50° x 0.328

p max = 10.0 bar


H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
101.6	40.0	36.0	PV13P040100_	3.2	285	522
101.6	50.0	46.0	PV13P050100_	3.5	357	654
159.2	40.0	36.0	PV13P040160_	4.8	440	806
159.2	50.0	46.0	PV13P050160_	5.4	550	1008




UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°

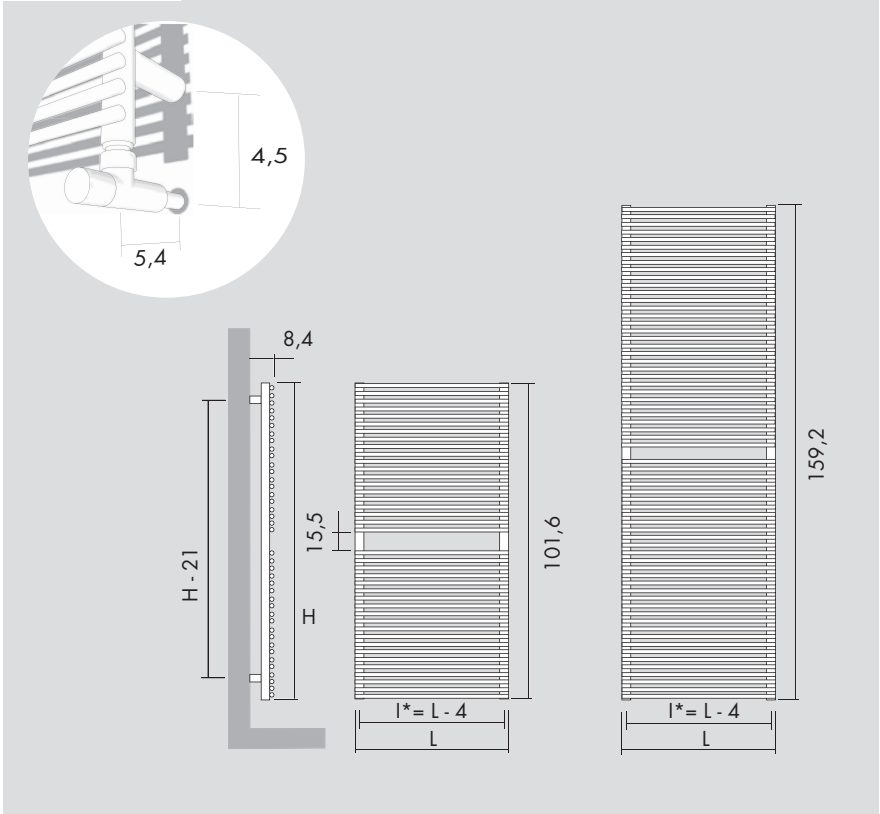

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

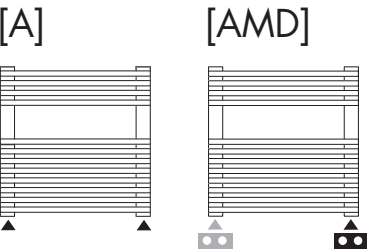

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

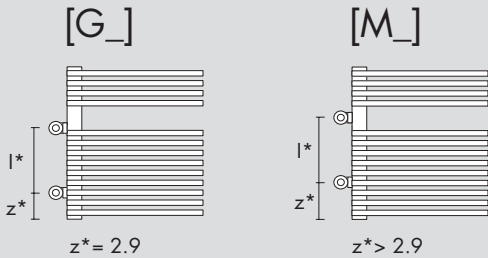

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento


Dual application with schuko plug / Version mixte avec prise schuko / Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	l* cm	art*	li*	watt Δt 30°	watt Δt 50°	watt
101.6	40.0	29.5	MC PV13P040100_	3.2	285	365	500
101.6	50.0	39.5	MC PV13P050100_	3.5	357	455	700
159.2	40.0	29.5	MC PV13P040160_	4.8	440	833	700
159.2	50.0	39.5	MC PV13P050160_	5.4	550	1 012	1 000

Standard



Heating element
Résistance
Heizstab
Resistencia

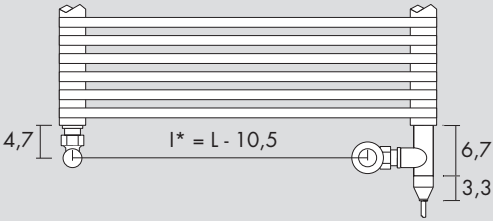

4,7 | $l^* = L - 10,5$ | 6,7
3,3

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



ECODESIGN
Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T11

Dual electric element with thermostat / Mixte résistance avec thermostat / Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	l* cm	art*	li*	watt Δt 30°	watt Δt 50°	watt
101.6	40.0	29.5	MT PV13P040100_	3.2	285	365	500
101.6	50.0	39.5	MT PV13P050100_	3.5	357	455	700
159.2	40.0	29.5	MT PV13P040160_	4.8	440	833	700
159.2	50.0	39.5	MT PV13P050160_	5.4	550	1 012	1 000

Standard




Thermostat
Thermostat
Der Thermostat
Termostato

[BIAN]
[CROM]



ECODESIGN
Infrared remote control
Télécommande infrarouge
Infrarot-Fernbedienung
Mando por infrarrojos

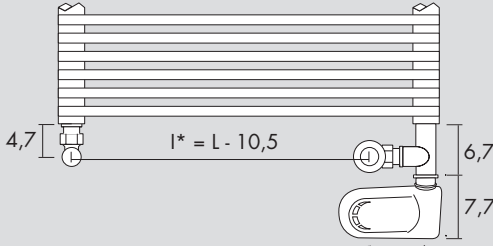

4,7 | $l^* = L - 10,5$ | 6,7
7,7

Optional




Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra

[BIAN] **E12SQB**
[CROM] **E12SQR**



Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[BIAN] **TTB**
[CROM] **TTR**



$\varnothing \leq 16\text{ mm}$
[BIAN] **CTB**
[CROM] **CTR**

$16\text{ mm} < \varnothing < 24\text{ mm}$
[BIAN] **CWB**
[CROM] **CWR**



2 pz.
Towel hooks
Paire de patère
Crochet das Bugel
Percha

[CROM] **BA25R**
[COLOUR] **BA25C**
[GOLD] **BA25G**

art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
li* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento